


FIRE HOSE REEL

- Quick-Fit Design, Ease Installation and Maintenance
- Full Center Drum Spindle
- Full Brass Internal Waterway and Gooseneck
- Heavy Duty Connection Block
- Test By 2,000 kPa Hydraulic Pressure
- Large Plate, Thin Profile



*Quick-Fit with
 Only One Hex-Nut*

Wolf Hose Reel Technical Data Sheet	
Item No.	WR36
BSI Certificate No.	544723
Activfire Certificate No.	AFP-2355
Design Manufacture Standard	AS1221
Side Plate	Material: 1.0mm Mild Steel Diameter: 550mm Finishing: Powder Coating Color: Red
Hose Support	Full Center Drum Materil:1.0mm Mild Steel Finishing: Powder Coating
Mark Plate	Material: UV treated PVC
Inlet Pipe	1" Galvanized Steel
Waterway and Goose Neck	Brass
PVC Hose with AS/NZ 1221 Certificate	19mmx 36m Colour: Black
Hose Reel Shut-off Valve with Watermark certificate	Material: Brass with stainless steel ball Spec. No. 12 LIC WMK50016
Brass Nozzle	Jet type
Workin Pressure/Test Pressure	12 Bar / 20 Bar
Carton Size	615 x 245 x 560mm

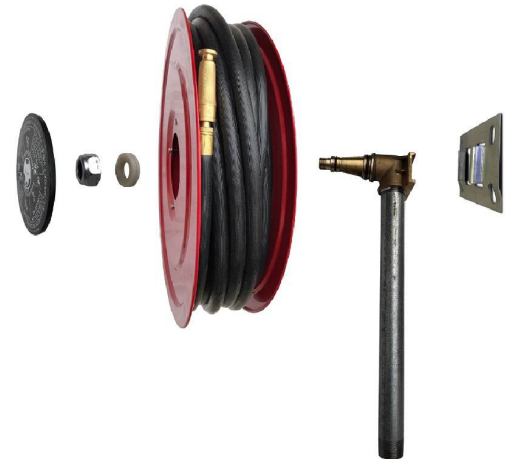

A warranty of twelve (12) months from the date purchase applies to all Wolf fire hose reels when installed to Australian standards AS 2441:2005 and serviced and maintained in accordance to AS 1851:2005

Wolf fire hose reels have been designed and manufactured according to AS/NZ 1221:1997. All Wolf fire hose reels carry the BSI



Benchmark and Activfire certification. Ball valve has been certified with WaterMark No. W50016.